SuperSnake GT02S/GT02SW

The ultimate distance and access solution

In brief

- Suitable for Fe/SS/Al/FCW/MCW filler wires
- Includes voltage and wire speed adjustment
- Large, clear meter display
- Brights LED cabinet lighting
- 10, 15, 20, 25m air- and water-cooled models
- Visible safety with tough, bright orange sheathing

Applications

- Heavy and medium-heavy metal fabrication workshops
- Shipyards and offshore industry
- Installation and set-up

Key features

If distance and access are your problem, then take a look at SuperSnake GT02S and GT02SW. SuperSnake extends the reach of standard Euro MIG welding guns, providing simple distance wire feeding for a variety of filler wires up to 30m from the wire feed unit.Negotiating its terrain with ease, SuperSnake is the ultimate predator of the welding world.

The SuperSnake GT02S/GT02SW removes the need to carry large and heavy wire feed units, reducing personnel fatigue, improving safety, and increasing productivity. The SuperSnake connects easily to FastMig MXF wire feed units, bringing quality welding to locations that other welding brands just can't reach.

SuperSnake GT02S/GT02SW is compatible with FastMig KMS, FastMig Pulse, Kemppi Pro equipment.

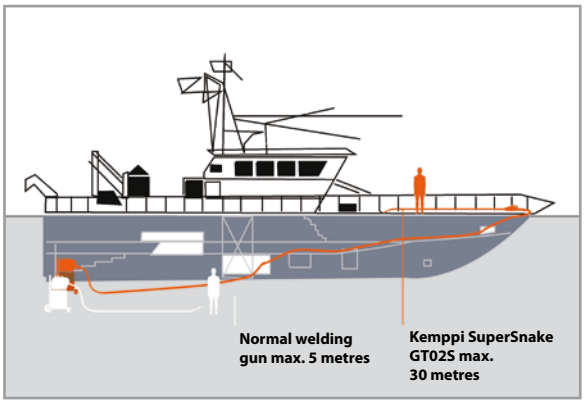

Technical specification

SuperSnake			
Output 40 °C	60 % ED	380 A	
Wire feed mechanism		2-roll	
Wire feed speed		0…25 m/min	
Feeder body (GT02SW) dimensions L x W x H		102 x 371 x 138 mm	
Wire recommendations, 25 m		Solid Fe/Ss	ø 1.0…1.6 mm
		Al alloys	ø 1.2…1.6 mm
		FCW/MCW	ø 1.2…1.6 mm
Cable diameter		50 mm²	
Supply voltage		50 VDC	
Protection class		IP23S	

For more product information, videos and news, please visit our website at www.kemppi.com

KEMPPI
The Joy of Welding

AD711EN
1213

SuperSnake GT02S/GT02SW

Ordering information

SuperSnake	
GT02S, 10 m	6153100
GT02S, 15 m	6153150
GT02S, 20 m	6153200
GT02S, 25 m	6153250
GT02SW, 10 m	6154100
GT02SW, 15 m	6154150
GT02SW, 20 m	6154200
GT02SW, 25 m	6154250
MXF synchronisation kit	W004030

When connected with Kemppi FastMig equipment, SuperSnake is compatible with the RMT10 Gun remote control, making real-time power management or remote channel selection easy and convenient.

Additional information

SLENDER PROFILE. A tough and slim body profile makes it easy for the SuperSnake GT02S to follow the welder into the tightest spaces. There is no need to carry large, heavy wire feed units and cable sets.

MANY OPTIONS. Model options include 10-, 15-, 20-, and 25-metre air- and liquid-cooled units. You have real choice for your welding environment.

REMOTE POWER CONTROL. Easy and simple parameter adjustments are exactly where you need them – at the welding end. Adjust weld characteristics precisely in real time.

METER DISPLAY. A large and clear meter display provides a welding parameter reference just where the welder needs it. The unit stores weld data conveniently for 30 s after welding.

BRIGHTS™. LED cabinet lighting illuminates the wire feed mechanism from switch-on, improving visibility and safety for wire feed mechanism adjustment in low light conditions.

GT WIREDRIVE™. Provides many years of reliable service. Simple adjustments, quick-change drive, and pressure rolls make life easy and simple.

GUN CHOICE. The standard Euro gun connector allows a variety of welding guns to be fitted, including Kemppi's award-winning WeldSnake distance gun range.

LOW FRICTION LOSS. Kemppi gun models use a unique, patented range of low-friction-loss DL liner materials that make welding and feeding aluminium and stainless steel wires over a distance simple and cost-effective.

VISIBLE SAFETY. Encased in high-visibility bright orange composite material, the SuperSnake GT02S has tough and slippery sheathing, supporting, protecting, and preventing cable stretch, plus signalling the potential tripping hazard.

DECK OR BOOM. Use as a `deck-based' or 'boom delivery' system. With the optional aerial hanging kit, the SuperSnake GT02S can be conveniently positioned above the welding areaas a boom delivery wire feed system.